



Catalog of Fan coil unit

Ultra-thin Fan Coil Unit (MFP Series)

Specification:

- Air flow: 400-600m³/h
- Cooling capacity: 2600W-4300W
- Heating capacity: 3200W-5400W
- The thickness of the unit is 130mm
- With Led display thermostat
- Europe/American/British plugs are available


Detail Pictures:





Catalog of Fan coil unit



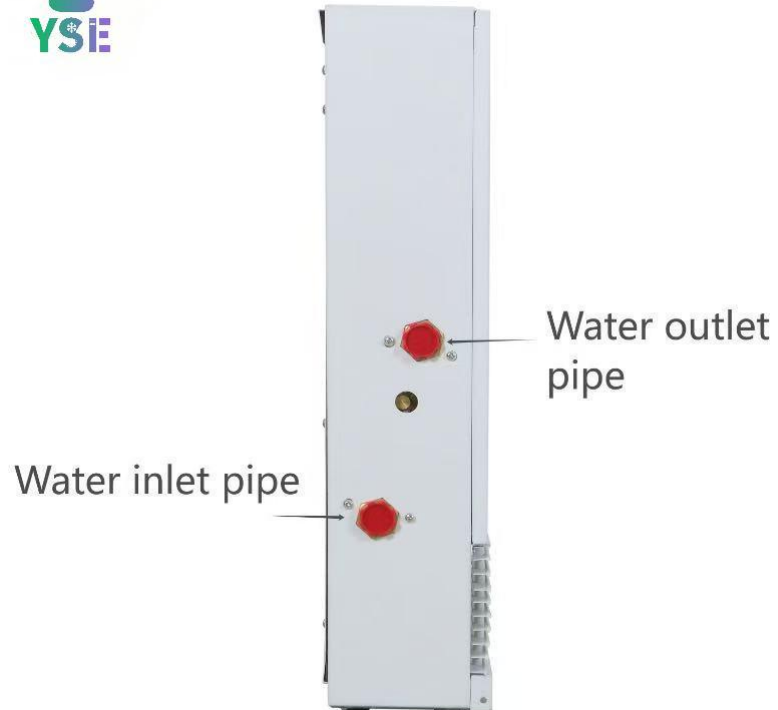

Brush-less Motor:





1. OFF/ON button. Press this button to turn on/off the device.
2. AUTO button. Press this button to select air auto.
3. — button. Press this button to decrease the temperature.
4. + button. Press this button to increase the temperature.
5. FAN button. Press this button to select the fan speed(low/middle/high).
6.  button. Press this button to move the air left and right.
7.  button. Press this button to move the air up and down..
- 8.BREEZE button. Press this button to get gentle air.
9. LIGHT button. Press the button to turn on/off the led light.
- 10.TEMP button. Press this button to show temperature.
- 11 .TIMER button. Press this button to timing.
12. COOL button. Press this button to enter cool mode.
13. HEAT button. Press this button to enter heat mode.
14. AIR button. Press this button to enter ventilate mode.



Catalog of Fan coil unit

Data Table

Performance		Model		
		MFP-40	MFP-50	MFP-60
Air volume	H	400	500	600
(m ³ /h)	M	360	450	540
	L	320	400	480
Cooling (w)	H	2600	3500	4300
	M	2340	3150	3870
	L	2100	2830	3480
Heating	H	3200	4300	5400
(w)	M	2880	3870	4860
	L	2590	3480	4370
Noise db(A)		<43	<45	<48
Input power (W)		65	82	98
Temperature for cold water		7°C~12°C		
Temperature heat water		65°C~60°C		
Power(V / HZ)		Single-phase power supply 220v、50Hz		
Water pipes(Dia)		R3/4"	R3/4"	R3/4"
Drain pipe(Dia)		R1/2"	R1/2"	R1/2"
Size L×W×H		990*130*585	1085*130*585	1220*130*585
Weight of unit(kg)		23	25	26